


Dimensions

(UNIT : mm)

Ratings			Soft Start with Line Start Section			
Volts	Max. Amps	Nominal Max.HP	Model	Dimensions		
				H	W	D
2300	160	650	MVC2-23160-E-SWG	2336.8	914.4	762
	320	1250	MVC2-23320-E-SWG	2336.8	914.4	762
	600	2500	MVC2-23600-E-SWG	2336.8	1828.8	762
3300	160	800	MVC2-33160-E-SWG	2336.8	914.4	762
	320	1600	MVC2-33320-E-SWG	2336.8	914.4	762
	600	3000	MVC2-33600-E-SWG	2336.8	1828.8	762
4160	200	1250	MVC2-41200-E-SWG	2336.8	914.4	762
	400	2500	MVC2-41400-E-SWG	2336.8	914.4	762
	600	5000	MVC2-41600-E-SWG	2336.8	1828.8	762
6600 / 6900	200	2500	MVC2-66200-E-SWG	2336.8	1676.4	762
	400	5000	MVC2-66400-E-SWG	2336.8	1676.4	762
	600	7500	MVC2-66600-E-SWG	Contact Factory		
11-14KV	300	7500	MVC2-130300-E-SWG	2336.8	3048	1117.6

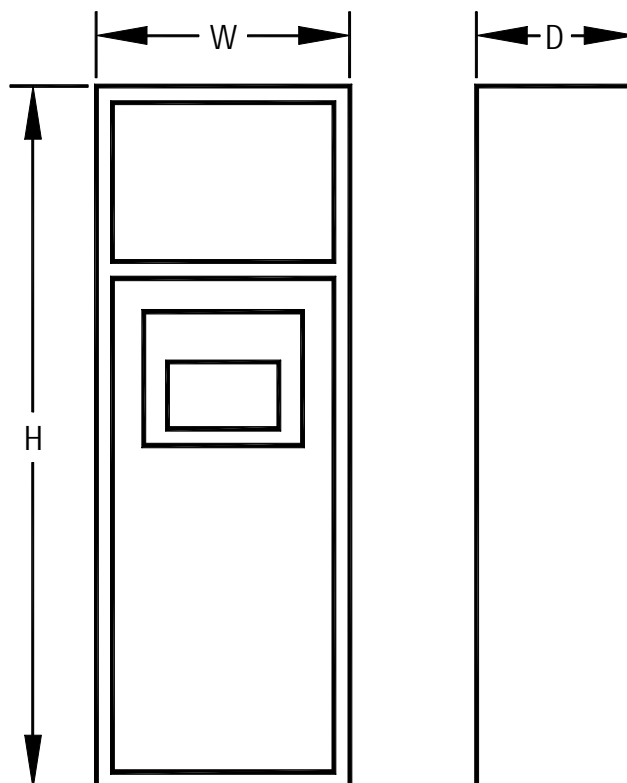

Di mensi ons

(UNIT : mm)

Ratings			Optional Soft Start Only			
Volts	Max. Amps	Nominal Max.HP	Model	Dimensions		
				H	W	D
2300	160	650	MVC2-23160-E	2336.8	914.4	762
	320	1250	MVC2-23320-E	2336.8	914.4	762
	600	2500	MVC2-23600-E	2336.8	914.4	762
3300	160	800	MVC2-33160-E	2336.8	914.4	762
	320	1600	MVC2-33320-E	2336.8	914.4	762
	600	3000	MVC2-33600-E	2336.8	914.4	762
4160	200	1250	MVC2-41200-E	2336.8	914.4	762
	400	2500	MVC2-41400-E	2336.8	914.4	762
	600	5000	MVC2-41600-E	2336.8	914.4	762
6600 / 6900	200	2500	MVC2-66200-E	2336.8	1828.8	762
	400	5000	MVC2-66400-E	2336.8	1828.8	762
	600	7500	MVC2-66600-E	2336.8	1828.8	762
11 - 14KV	300	7500	Not Available	Not Available		

