



TECHNICAL CATALOGUE AC DRIVES



MOTORTRONICS VFX/FDU 2.1
0.37 - 3000 KW, 230 - 690V
IP20, IP21 AND IP54

Optimized operation and full control



CONTENTS

MOTORTRONICS VFX page 3 

MOTORTRONICS FDU page 11 


General specifications page 19 

Standard options page 27 

General information overview for MOTORTRONICS FDU 2.1 and VFX 2.1

MOTORTRONICS FDU 2.1/VFX 2.1	IP20/21 Frame sizes C2 - FA2/C2(69)-F2(69)	IP54/20 Frame sizes B-H8/C69-T69
Power range	5.5 - 200 kW / 7.5 - 250 hp	0.37 - 3000 kW / 0.5 - 4000 hp
Voltage range	3 ph, 230 - 690 V	3 ph, 230 - 690 V
IP class	IP20/21	IP54/20
Control mode	VFX : Direct torque control or V/Hz, FDU: V/Hz	
DC choke	Standard	Standard
EMC filter	C3 is standard, C2 is optional	
Communication	RS-485 (Modbus RTU) is standard	
Coated boards	Standard	Standard
Detachable control panel - multilanguage	Standard	Standard
Options	Encoder, PTC/PT100, Extended IO Safe Torque Off (STO), External control panel, CRIO (only VFX)	
Serial communication option	RS232/485 (Modbus RTU)	
Communication options	DeviceNet, Modbus/TCP, Profibus Profinet IO, EtherNet IP EtherCAT, CANopen	
Liquid cooling	N.a.	Optional for frame sizes E and up
IP21 top cover	Optional	N.a.

CE certification 	All sizes	
UKCA certification 	All sizes	
UL certification cULus certification 	UL/cUL approved (480V)	
Marine certification 		DNV, BV
EAC 	All sizes	

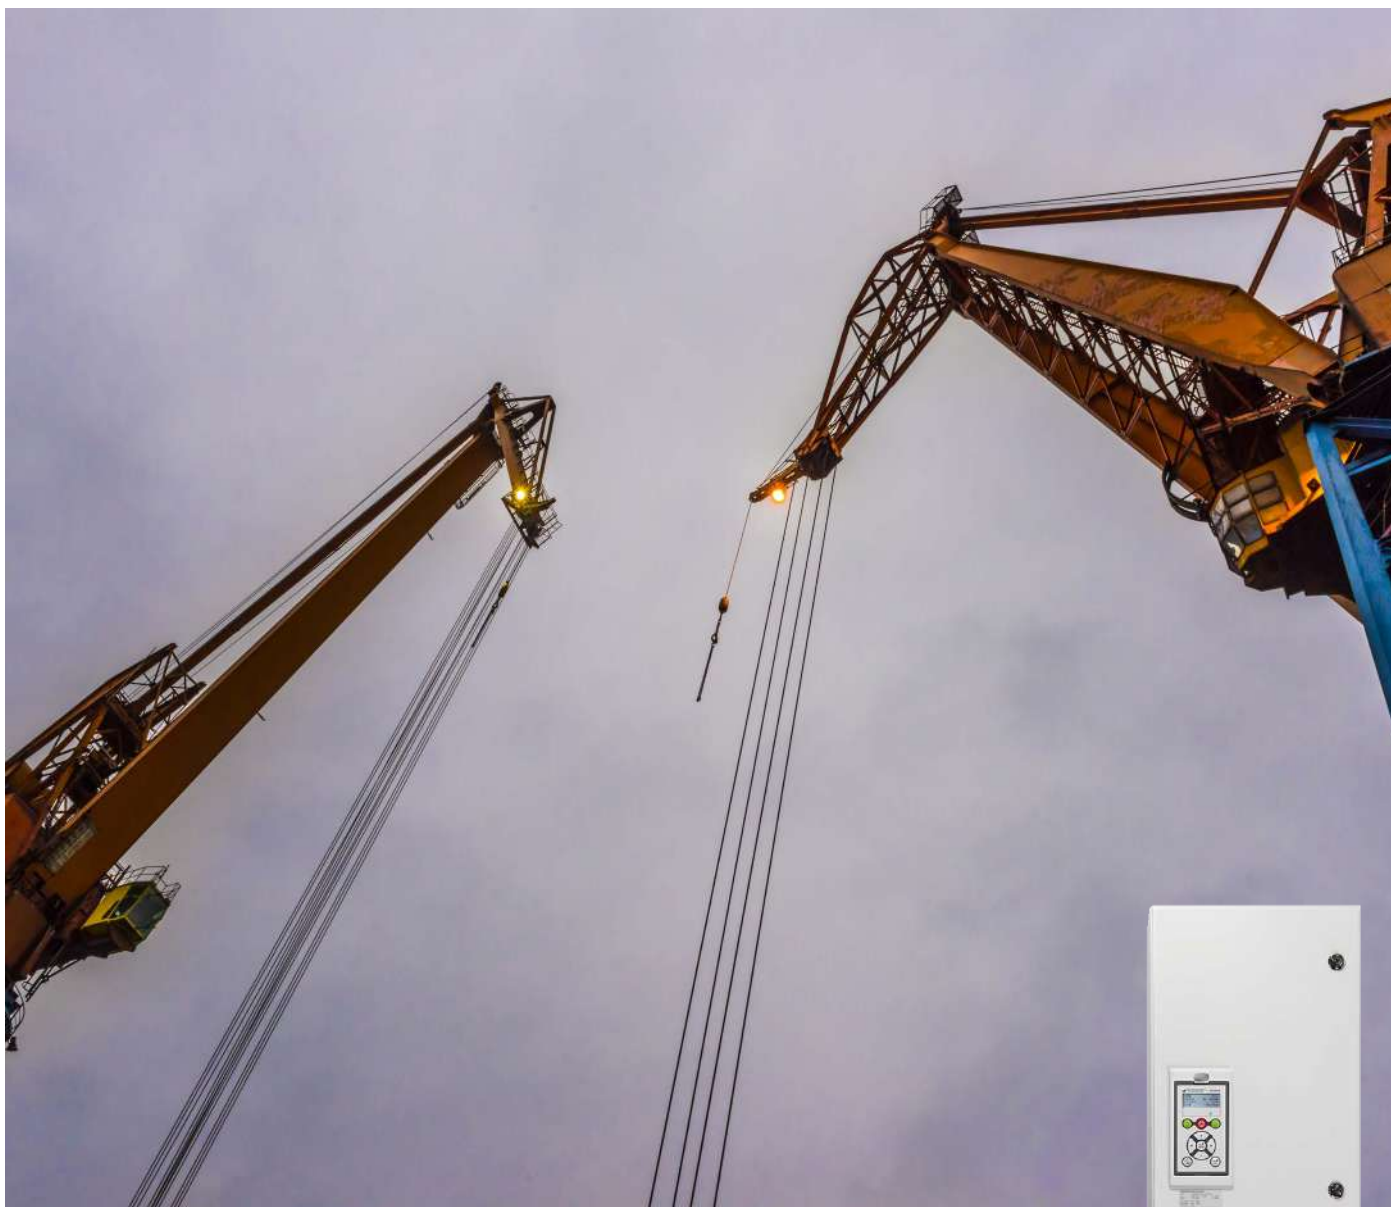

Motortronics VFX 2.1 High dynamics for demanding applications

The Motortronics VFX 2.1 AC drive optimizes your process and prevents damage and downtime. The combination of direct torque control, accurate speed control, and efficient vector braking makes it the ideal solution for all dynamic and constant torque applications, such as cranes, crushers, mills, mixers, and centrifuges.

MAIN FEATURES

- NEW - Control panel with Real time clock. Optional Bluetooth & Wifi communication.
- Available as robust and certified IP54 metal construction or IP20/21 version.
- All drive sizes are delivered with a built-in Category C3 EMC-filter as standard. C3 requirements are tested with 80 m motor cable.
- Direct torque control reacts extremely quickly and eliminates disturbances due to abrupt load changes.
- Load monitor function included as standard.
- UL (UL 840) approved version available.
- Marine (DNV & BV) approved version available (only IP54).
- Integrated vector braking ensures quick and controlled stops, increasing productivity and safety.
- Built-in brake chopper is available as option for all sizes.
- Temp / Speed controlled fans assures less noise, a more even drive temperature and higher drive efficiency.
- Detachable multi-language control panel included as standard. Following languages are supported in the control panel: English, Swedish, Dutch, German, French, Spanish, Russian, Italian, Czech, Turkish and Polish.
- Operation parameters can be set in your process units, for example m/sec, tons/h or cycles/min.
- Removable control panel with own memory means it is easy to transfer or copy settings.
- Liquid cooled version available for sizes above 90 A.

Motortronics VFX 2.1 - IP54 version

Typical motor power at 3-phase mains voltage 230 V (Model 48-430 and up also available as IP20).

VFX Model	Max. output current [A]*	Normal duty (120%, 1 min. every 10 min.)				Heavy duty (150%, 1 min. every 10 min.)			Frame size	IP class					
		Power @ 230V [kW]	Power @ 230V [hp]	Rated current [A]	Power losses [kW]	Power @ 230V [kW]	Power @ 230V [hp]	Rated current [A]							
VFX48-003-54	3.8	0.37	0.5	2.5	0.08	0.37	0.5	2.0	B	IP54 wall mounted					
VFX48-004-54	6.0	0.75	1	4.0	0.10	0.55	0.75	3.2							
VFX48-006-54	9.0	1.1	1.5	6.0	0.13	0.75	1	4.8							
VFX48-008-54	11.3	1.5	2	7.5	0.15	1.1	1.5	6.0							
VFX48-010-54	14.3	2.2	3	9.5	0.19	1.5	2	7.6							
VFX48-013-54	19.5	2.2	3	13.0	0.20	2.2	3	10.4							
VFX48-018-54	27.0	4	5	18.0	0.27	3	3	14.4							
VFX48-026-54	39	5.5	7.5	26	0.34	4	5	21	C		IP54 wall mounted				
VFX48-031-54	46	7.5	10	31	0.41	5.5	7.5	25							
VFX48-037-54	55	7.5	10	37	0.45	7.5	10	29.6							
VFX48-046-54	69	11	15	46	0.58	7.5	10	37							
VFX48-061-54	92	15	20	61	0.8	11	15	49	D			IP54 wall mounted			
VFX48-074-54	111	18.5	25	74	1.0	15	20	59							
VFX48-090-54	108	22	30	90	1.1	18.5	25	72	E				IP54 wall mounted		
VFX48-109-54	131	30	40	109	1.4	22	30	87							
VFX48-146-54	175	37	50	146	1.8	30	40	117							
VFX48-175-54	210	45	60	175	2.2	37	50	140							
VFX48-210-54	252	55	75	210	2.4	45	60	168	F					IP54 wall mounted	
VFX48-250-54	300	75	100	250	3.1	55	75	200							
VFX48-295-54	354	90	125	295	3.4	75	100	236							
VFX48-365-54	438	110	150	365	3.7	90	125	292	FA						IP54 wall mounted
VFX48-430-IP	516	110	150	430	5.4	110	125	344	H						
VFX48-500-IP	600	160	200	500	6.2	110	150	400	G2						
VFX48-590-IP	708	200	250	590	6.8	132	200	472	H2	IP20 module or IP54 cabinet					
VFX48-660-IP	792	200	250	660	7.0	160	200	528							
VFX48-730-IP	876	220	300	730	7.4	160	250	584	G3						
VFX48-810-IP	972	250	350	810	9.4	200	250	648							
VFX48-885-IP	1062	250	350	885	10.2	220	300	708	H3						
VFX48-1010-IP	1212	315	400	1010	10.5	250	350	808							
VFX48-1100-IP	1320	355	450	1100	11.1	250	350	880	H4						
VFX48-1300-IP	1560	400	550	1300	13.3	315	450	1040							
VFX48-1460-IP	1752	450	600	1460	14.8	355	500	1168	H5						
VFX48-1710-IP	2052	560	750	1710	17.5	450	550	1368							
VFX48-1820-IP	2148	600	800	1820	18.5	450	600	1456	H6						
VFX48-2190-IP	2628	710	900	2190	22.2	560	750	1752							
VFX48-2550-IP	3060	800	1100	2550	25.9	630	850	2040	H7						
VFX48-2920-IP	3504	900	1200	2920	29.6	750	1000	2336	H8						
Larger sizes available on request															

Larger sizes available on request

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature
IP = Available as IP20 module or mounted in IP54 cabinet.

Motortronics VFX 2.1 - IP54 version

Typical motor power at 3-phase mains voltage 400 V and 460 V (Model 48-430 and up also available as IP20).

VFX Model	Max. output current [A]*	Normal duty (120%, 1 min. every 10 min.)				Heavy duty (150%, 1 min. every 10 min.)			Frame size	IP class					
		Power @ 400V [kW]	Power @ 460V [hp]	Rated current [A]	Power losses [kW]	Power @ 400V [kW]	Power @ 460V [hp]	Rated current [A]							
VFX48-003-54	3.8	0.75	1	2.5	0.09	0.55	1	2.0	B	IP 54 wall mounted					
VFX48-004-54	6.0	1.5	2	4.0	0.11	1.1	1.5	3.2							
VFX48-006-54	9.0	2.2	3	6.0	0.14	1.5	2	4.8							
VFX48-008-54	11.3	3	3	7.5	0.17	2.2	3	6.0							
VFX48-010-54	14.3	4	5	9.5	0.22	3	3	7.6							
VFX48-013-54	19.5	5.5	7.5	13.0	0.24	4	5	10.4							
VFX48-018-54	27.0	7.5	10	18.0	0.31	5.5	7.5	14.4							
VFX48-026-54	39	11	15	26	0.38	7.5	10	21	C		IP 54 wall mounted				
VFX48-031-54	46	15	20	31	0.45	11	15	25							
VFX48-037-54	55	18.5	25	37	0.50	15	20	29.6							
VFX48-046-54	69	22	30	46	0.64	18.5	25	37	D			IP 54 wall mounted			
VFX48-061-54	92	30	40	61	0.9	22	30	49							
VFX48-074-54	111	37	50	74	1.0	30	40	59	E				IP 54 wall mounted		
VFX48-090-54	108	45	60	90	1.2	37	50	72							
VFX48-109-54	131	55	75	109	1.5	45	60	87							
VFX48-146-54	175	75	100	146	2.0	55	75	117							
VFX48-175-54	210	90	125	175	2.4	75	100	140							
VFX48-210-54	252	110	150	210	2.7	90	125	168	F					IP 54 wall mounted	
VFX48-250-54	300	132	200	250	3.3	110	150	200							
VFX48-295-54	354	160	250	295	3.6	132	200	236							
VFX48-365-54	438	200	300	365	4.0	160	250	292	FA						IP 54 wall mounted
VFX48-430-IP	516	220	350	430	5.5	200	250	344	H	IP20 module or IP54 cabinet					
VFX48-500-IP	600	250	400	500	6.7	220	350	400	G2						
VFX48-590-IP	708	315	500	590	7.2	250	400	472	H2						
VFX48-660-IP	792	355	550	660	7.4	250	450	528							
VFX48-730-IP	876	400	600	730	8.0	315	500	584	G3						
VFX48-810-IP	972	450	700	810	9.9	355	550	648							
VFX48-885-IP	1062	500	750	885	10.8	400	600	708	H3						
VFX48-1010-IP	1212	560	800	1010	11.1	450	700	808							
VFX48-1100-IP	1320	630	900	1100	12.0	500	750	880	H4						
VFX48-1300-IP	1560	710	1100	1300	14.3	560	800	1040							
VFX48-1460-IP	1752	800	1250	1460	16.0	630	1000	1168	H5						
VFX48-1710-IP	2052	900	1500	1710	18.9	750	1200	1368							
VFX48-1820-IP	2184	1000	1600	1820	20.0	800	1250	1456	H6						
VFX48-2190-IP	2628	1200	1900	2190	24.0	1000	1500	1752							
VFX48-2550-IP	3060	1400	2100	2550	28.0	1120	1700	2040	H7		H8				
VFX48-2920-IP	3504	1600	2500	2920	32.0	1300	2000	2336							
Larger sizes available on request															

Larger sizes available on request

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature
IP = Available as IP20 module or mounted in IP54 cabinet.

Motortronics VFX 2.1 - IP54 version

Typical motor power at 3-phase mains voltage 525 V and 460 V (Model 69-250 and up also available as IP20).

VFX Model	Max. output current [A]*	Normal duty (120%, 1 min. every 10 min.)			Heavy duty (150%, 1 min. every 10 min.)		Frame size	IP class
		Power @525 V [kW]	Rated current [A]	Power losses [kW]	Power @525 V [kW]	Rated current [A]		
VFX52-003-54	3.8	1.1	2.5	0.10	1.1	2.0	B	IP54 wall mounted
VFX52-004-54	6.0	2.2	4.0	0.12	1.5	3.2		
VFX52-006-54	9.0	3	6.0	0.15	2.2	4.8		
VFX52-008-54	11.3	4	7.5	0.19	3	6.0		
VFX52-010-54	14.3	5.5	9.5	0.25	4	7.6		
VFX52-013-54	19.5	7.5	13.0	0.26	5.5	10.4		
VFX52-018-54	27.0	11	18.0	0.34	7.5	14.4		
VFX52-026-54	39	15	26	0.40	11	21	C	
VFX52-031-54	46	18.5	31	0.48	15	25		
VFX52-037-54	55	22	37	0.54	18.5	29.6		
VFX52-046-54	69	30	46	0.68	22	37		
VFX52-061-54	92	37	61	0.9	30	49	D	
VFX52-074-54	111	45	74	1.1	37	59		
VFX69-082-54	98	55	82	1.5	45	66	F69	
VFX69-090-54	108	55	90	1.7	45	72		
VFX69-109-54	131	75	109	2.0	55	87		
VFX69-146-54	175	90	146	2.6	75	117		
VFX69-175-54	210	110	175	3.0	90	140		
VFX69-200-54	240	132	200	3.4	110	160		
VFX69-250-IP	300	160	250	4.3	132	200	H69 (2)	IP20 module or IP54 cabinet
VFX69-300-IP	360	200	300	5.3	160	240		
VFX69-375-IP	450	250	375	6.4	200	300		
VFX69-400-IP	480	250	400	6.9	220	320		
VFX69-430-IP	516	300	430	7.7	250	344	I69 (3)	
VFX69-500-IP	600	315	500	8.6	300	400		
VFX69-595-IP	720	400	600	10.4	315	480		
VFX69-650-IP	780	450	650	11.3	355	520	J69 (4)	
VFX69-720-IP	864	500	720	12.4	400	576		
VFX69-800-IP	960	560	800	13.8	450	640		
VFX69-995-IP	1200	630	1000	17.3	500	800	KA69 (5)	
VFX69-1K2-IP	1440	800	1200	20.7	630	960	K69 (6)	
VFX69-1K4-IP	1680	1000	1400	24.2	800	1120	L69 (7)	
VFX69-1K6-IP	1920	1100	1600	27.6	900	1280	M69 (8)	
VFX69-1K8-IP	2160	1300	1800	31.1	1000	1440	N69 (9)	
VFX69-2K0-IP	2400	1400	2000	34.6	1100	1600	O69 (10)	
VFX69-2K2-IP	2640	1600	2200	38.0	1200	1760	P69 (11)	
VFX69-2K4-IP	2880	1700	2400	41.4	1400	1920	Q69 (12)	
VFX69-2K6-IP	3120	1900	2600	44.9	1500	2080	R69 (13)	
VFX69-2K8-IP	3360	2000	2800	48.4	1600	2240	S69 (14)	
VFX69-3K0-IP	3600	2200	3000	51.8	1700	2400	T69 (15)	

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.

** Number in parenthesis, e.g. H69 (2), indicates number of parallel power modules.

IP = Available as IP20 module or mounted in IP54 cabinet.

Motortronics VFX 2.1 - IP54 version

Typical motor power at 3-phase mains voltage 575 V and 690 V (Model 69-250 and up also available as IP20).

VFX Model	Max output current [A]*	Normal duty (120%, 1 min. every 10 min.)				Heavy duty (150%, 1 min. every 10 min.)			Frame size	IP class
		Power @ 575V [hp]	Power @ 690V [kW]	Rated current [A]	Power losses [kW]	Power @ 575 V [hp]	Power @ 690V [kW]	Rated current [A]		
VFX69-002-54	3.2	1.5	1.5	2	0.17	1	0.75	1.6	C69	IP54 wall-mounted
VFX69-003-54	4.8	2	2.2	3	0.16	1.5	1.5	2.4		
VFX69-004-54	6.4	3	3	4	0.20	2	2.2	3.2		
VFX69-006-54	9.6	4	4	6	0.23	3	3	4.8		
VFX69-008-54	12.8	5	5.5	8	0.26	4	4	6.4		
VFX69-010-54	16	7.5	7.5	10	0.30	5	5.5	8		
VFX69-013-54	20.8	10	11	13	0.34	7.5	7.5	10.4		
VFX69-018-54	29	15	15	18	0.37	10	11	14.4		
VFX69-021-54	34	20	18.5	21	0.45	15	15	16.8		
VFX69-025-54	40	25	22	25	0.52	20	18.5	20		
VFX69-033-54	53	30	30	33	0.90	25	22	26	D69	
VFX69-042-54	67	40	37	42	1.08	30	30	34		
VFX69-050-54	80	50	45	50	1.14	40	37	40		
VFX69-058-54	93	60	55	58	1.30	40	45	46		
VFX69-082-54	98	75	75	82	1.8	60	55	66	F69	
VFX69-090-54	108	75	90	90	1.9	60	75	72		
VFX69-109-54	131	100	110	109	2.3	75	90	87		
VFX69-146-54	175	125	132	146	2.9	100	110	117		
VFX69-175-54	210	150	160	175	3.4	125	132	140		
VFX69-200-54	240	200	200	200	3.9	150	160	160		
VFX69-250-IP	300	250	250	250	4.9	200	200	200	H69 (2)	IP20 module or IP54 cabinet
VFX69-300-IP	360	300	315	300	6.0	250	250	240		
VFX69-375-IP	450	350	355	375	7.2	300	315	300		
VFX69-400-IP	480	400	400	400	7.7	300	315	320		
VFX69-430-IP	516	400	450	430	8.8	350	315	344	I69 (3)	
VFX69-500-IP	600	500	500	500	9.7	400	355	400		
VFX69-595-IP	720	600	600	600	11.6	500	450	480		
VFX69-650-IP	780	650	630	650	12.8	550	500	520	J69 (4)	
VFX69-720-IP	864	750	710	720	14.0	600	560	576		
VFX69-800-IP	960	850	800	800	15.5	650	630	640		
VFX69-905-IP	1080	950	900	900	17.5	750	710	720	KA69 (5)	
VFX69-995-IP	1200	1000	1000	1000	19.4	850	800	800		
VFX69-1K2-IP	1440	1200	1200	1200	23.2	1000	900	960	K69 (6)	
VFX69-1K4-IP	1680	1500	1400	1400	27.2	1200	1120	1120	L69 (7)	
VFX69-1K6-IP	1920	1700	1600	1600	31.1	1300	1250	1280	M69 (8)	
VFX69-1K8-IP	2160	1900	1800	1800	35.0	1500	1400	1440	N69 (9)	
VFX69-2K0-IP	2400	2100	2000	2000	38.8	1700	1600	1600	O69 (10)	
VFX69-2K2-IP	2640	2300	2200	2200	42.7	1800	1700	1760	P69 (11)	
VFX69-2K4-IP	2880	2500	2400	2400	46.6	2000	1900	1920	Q69 (12)	
VFX69-2K6-IP	3120	2700	2600	2600	50.5	2200	2000	2080	R69 (13)	
VFX69-2K8-IP	3360	3000	2800	2800	54.4	2400	2200	2240	S69 (14)	
VFX69-3K0-IP	3600	3200	3000	3000	58.3	2500	2400	2400	T69 (15)	

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature

** Number in parenthesis, e.g. H69 (2), indicates number of parallel power modules.

IP = Available as IP20 module or mounted in IP54 cabinet.

Motortronic VFX 2.1 - IP20 version

Typical motor power at 3-phase mains voltage 230 V.

VFX Model	Max. output current [A]*	Normal duty (120%, 1 min every 10 min)				Heavy duty (150%, 1 min every 10 min)			Frame size
		Power @ 230V [kW]	Power @230V [hp]	Rated current [A]	Power losses [kW]	Power @ 230V [kW]	Power @230V [hp]	Rated current [A]	
VFX48-025-20	38	5.5	7.5	25	0.35	4	5	20	C2
VFX48-030-20	45	7.5	10	30	0.44	5.5	7.5	24	
VFX48-036-20	54	7.5	10	36	0.46	7.5	10	29	
VFX48-045-20	68	11	15	45	0.60	7.5	10	36	
VFX48-058-20	68	15	20	58	0.77	11	15	46	
VFX48-060-20	90	15	20	60	0.8	11	15	48	D2
VFX48-072-20	108	18.5	25	72	0.9	15	20	58	
VFX48-088-20	132	22	30	88	1.2	18.5	25	70	
VFX48-105-20	132	30	40	105	1.3	22	30	84	
VFX48-142-20	170	37	50	142	1.7	30	40	114	E2
VFX48-171-20	205	45	60	171	2.1	37	50	137	
VFX48-205-20	246	55	75	205	2.3	45	60	164	F2
VFX48-244-20	293	75	100	244	3.0	55	75	195	
VFX48-293-20	352	90	125	293	3.4	75	100	235	
VFX48-365-20	438	110	150	365	3.7	90	125	292	FA2

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.



Motortronics VFX 2.1 - IP20 version

Typical motor power at 3-phase mains voltage 400 and 460 V.

VFX Model	Max. output current [A]*	Normal duty (120%, 1 min every 10 min)				Heavy duty (150%, 1 min every 10 min)			Frame size
		Power @ 400V [kW]	Power @460V [hp]	Rated current [A]	Power losses [kW]	Power @ 400V [kW]	Power @460V [hp]	Rated current [A]	
VFX48-025-20	38	11	15	25	0.39	7.5	10	20	C2
VFX48-030-20	45	15	20	30	0.48	11	15	24	
VFX48-036-20	54	18.5	25	36	0.51	15	20	29	
VFX48-045-20	68	22	30	45	0.66	18.5	25	36	
VFX48-058-20	68	30	40	58	0.85	22	30	46	
VFX48-060-20	90	30	40	60	0.9	22	30	48	D2
VFX48-072-20	108	37	50	72	1.0	30	40	58	
VFX48-088-20	132	45	60	88	1.3	37	50	70	
VFX48-105-20	132	55	75	105	1.4	45	60	84	
VFX48-142-20	170	75	100	142	1.9	55	75	114	E2
VFX48-171-20	205	90	125	171	2.3	75	100	137	
VFX48-205-20	246	110	150	205	2.6	90	125	164	F2
VFX48-244-20	293	132	200	244	3.2	110	150	195	
VFX48-293-20	352	160	250	293	3.6	132	200	235	
VFX48-365-20	438	200	300	365	4.1	160	250	292	FA2

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.



Motortronics VFX 2.1 - IP20 version

Typical motor power at 3-phase mains voltage 575 V and 690 V.

VFX Model	Max. output current [A]*	Normal duty (120%, 1 min. every 10 min.)				Heavy duty (150%, 1 min. every 10 min.)			Frame size
		Power @ 575V [hp]	Power @ 690V [kW]	Rated current [A]	Power losses [kW]	Power @ 575 V [hp]	Power @ 690V [kW]	Rated current [A]	
VFX69-002-20	3.2	1.5	1.5	2	0.17	1	0.75	1.6	C2(69)
VFX69-003-20	4.8	2	2.2	3	0.16	1.5	1.5	2.4	
VFX69-004-20	6.4	3	3	4	0.20	2	2.2	3.2	
VFX69-006-20	9.6	4	4	6	0.23	3	3	4.8	
VFX69-008-20	12.8	5	5.5	8	0.26	4	4	6.4	
VFX69-010-20	16	7.5	7.5	10	0.30	5	5.5	8	
VFX69-013-20	20.8	10	11	13	0.34	7.5	7.5	10.4	
VFX69-018-20	29	15	15	18	0.37	10	11	14.4	
VFX69-021-20	34	20	18.5	21	0.45	15	15	16.8	
VFX69-025-20	40	25	22	25	0.52	20	18.5	20	
VFX69-033-20	53	30	30	33	0.90	25	22	26	D2(69)
VFX69-042-20	67	40	37	42	1.08	30	30	34	
VFX69-050-20	80	50	45	50	1.14	40	37	40	
VFX69-058-20	93	60	55	58	1.30	40	45	46	

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.





Motortronics FDU 2.1 Secure the flow and save energy

The Motortronics FDU 2.1 AC drive is specially developed for controlling variable torque loads such as flow and pressure applications. It continuously adapts motor speed to the level required, minimizing energy consumption and wear. A unique monitoring functionality protects your process from damage and unplanned downtime. Typical applications are pumps, fans, compressors, and blowers.



MAIN FEATURES

- NEW - Control panel with Real time clock. Optional Bluetooth & Wifi communication.
- Available as robust and certified IP54 metal construction or IP20/21 version.
- All drive sizes are delivered with built-in Category C3 EMC-filter as standard. C3 requirements are tested with 80 m motor cable.
- Soft starts minimize start currents and linear stops prevent water hammer.
- One Motortronics FDU can control up to seven pumps/fans without external control systems.
- Energy saving function pauses the motor when it is not required to run to maintain pressure.
- Efficiency is increased by setting the pump to run at full speed at certain intervals to rinse out sludge.
- Temp/Speed controlled fans assures less noise, a more even drive temperature and higher efficiency.
- Load monitor function included as standard.
- Detachable multi-language control panel included as standard. Following languages are supported in the control panel: English, Swedish, Dutch, German, French, Spanish, Russian, Italian, Czech, Turkish and Polish.
- Operation parameters can be set in your process units, for example m³/min. and bar.
- Removable control panel with own memory means it is easy to transfer or copy settings.
- UL (UL 840) approved version available.
- Marine (DNV & BV) approved version available (only IP54).
- Liquid cooled version available for sizes above 90 A.

Motortronics FDU 2.1 - IP54 version

Typical motor power at 3-phase mains voltage 230 V (Model 48-430 and up also available as IP20).

FDU Model	Max. output current [A]*	Normal duty (120%, 1 min. every 10 min.)				Heavy duty (150%, 1 min. every 10 min.)			Frame size	IP class											
		Power @ 230V [kW]	Power @ 230V [hp]	Rated current [A]	Power losses [kW]	Power @ 230V [kW]	Power @ 230V [hp]	Rated current [A]													
FDU48-003-54	3.0	0.37	0.5	2.5	0.08	0.37	0.5	2.0	B	IP54 wall mounted											
FDU48-004-54	4.8	0.75	1	4.0	0.10	0.55	0.75	3.2													
FDU48-006-54	7.2	1.1	1.5	6.0	0.13	0.75	1	4.8													
FDU48-008-54	9.0	1.5	2	7.5	0.15	1.1	1.5	6.0													
FDU48-010-54	11.4	2.2	3	9.5	0.19	1.5	2	7.6													
FDU48-013-54	15.6	2.2	3	13.0	0.20	2.2	3	10.4													
FDU48-018-54	21.6	4	5	18.0	0.27	3	3	14.4													
FDU48-026-54	31	5.5	7.5	26	0.34	4	5	21	C		IP54 wall mounted										
FDU48-031-54	37	7.5	10	31	0.41	5.5	7.5	25													
FDU48-037-54	44	7.5	10	37	0.45	7.5	10	29.6													
FDU48-046-54	55	11	15	46	0.58	7.5	10	37													
FDU48-061-54	73	15	20	61	0.8	11	15	49	D			IP54 wall mounted									
FDU48-074-54	89	18.5	25	74	1.0	15	20	59													
FDU48-090-54	108	22	30	90	1.1	18.5	25	72	E				IP54 wall mounted								
FDU48-109-54	131	30	40	109	1.4	22	30	87													
FDU48-146-54	175	37	50	146	1.8	30	40	117													
FDU48-175-54	210	45	60	175	2.2	37	50	140													
FDU48-210-54	252	55	75	210	2.4	45	60	168	F					IP54 wall mounted							
FDU48-250-54	300	75	100	250	3.1	55	75	200													
FDU48-295-54	354	90	125	295	3.4	75	100	236													
FDU48-365-54	438	110	150	365	3.7	90	125	292	FA						IP54 wall mounted						
FDU48-430-IP	516	110	150	430	5.4	110	125	344	H	IP20 module or IP54 cabinet											
FDU48-500-IP	600	160	200	500	6.2	110	150	400													
FDU48-590-IP	708	200	250	590	6.8	132	200	472	G2							IP20 module or IP54 cabinet					
FDU48-660-IP	792	200	250	660	7.0	160	200	528	H2								IP20 module or IP54 cabinet				
FDU48-730-IP	876	220	300	730	7.4	160	250	584													
FDU48-810-IP	972	250	350	810	9.4	200	250	648	G3									IP20 module or IP54 cabinet			
FDU48-885-IP	1062	250	350	885	10.2	220	300	708													
FDU48-1010-IP	1212	315	400	1010	10.5	250	350	808	H3		IP20 module or IP54 cabinet										
FDU48-1100-IP	1320	355	450	1100	11.1	250	350	880													
FDU48-1300-IP	1560	400	550	1300	13.3	315	450	1040	H4										IP20 module or IP54 cabinet		
FDU48-1460-IP	1752	450	600	1460	14.8	355	500	1168													
FDU48-1710-IP	2052	560	750	1710	17.5	450	550	1368	H5			IP20 module or IP54 cabinet									
FDU48-1820-IP	2184	600	800	1820	18.5	450	600	1456													
FDU48-2190-IP	2628	710	900	2190	22.2	560	750	1752	H6				IP20 module or IP54 cabinet								
FDU48-2550-IP	3060	800	1100	2550	25.9	630	850	2040	H7											IP20 module or IP54 cabinet	
FDU48-2920-IP	3504	900	1200	2920	29.6	750	1000	2336	H8												IP20 module or IP54 cabinet
Larger sizes available on request																					

Larger sizes available on request

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature
IP = Available as IP20 module or mounted in IP54 cabinet.

Motortronics FDU 2.1 - IP54 version

Typical motor power at 3-phase mains voltage 400 V and 460 V (Model 48-430 and up also available as IP20).

FDU Model	Max. output current [A]*	Normal duty (120%, 1 min. every 10 min.)				Heavy duty (150%, 1 min. every 10 min.)			Frame size	IP class					
		Power @ 400V [kW]	Power @ 460V [hp]	Rated current [A]	Power losses [kW]	Power @ 400V [kW]	Power @ 460V [hp]	Rated current [A]							
FDU48-003-54	3.0	0.75	1	2.5	0.09	0.55	1	2.0	B	IP54 wall mounted					
FDU48-004-54	4.8	1.5	2	4.0	0.11	1.1	1.5	3.2							
FDU48-006-54	7.2	2.2	3	6.0	0.14	1.5	2	4.8							
FDU48-008-54	9.0	3	3	7.5	0.17	2.2	3	6.0							
FDU48-010-54	11.4	4	5	9.5	0.22	3	3	7.6							
FDU48-013-54	15.6	5.5	7.5	13.0	0.24	4	5	10.4							
FDU48-018-54	21.6	7.5	10	18.0	0.31	5.5	7.5	14.4							
FDU48-026-54	31	11	15	26	0.38	7.5	10	21	C		IP54 wall mounted				
FDU48-031-54	37	15	20	31	0.45	11	15	25							
FDU48-037-54	44	18.5	25	37	0.50	15	20	29.6							
FDU48-046-54	55	22	30	46	0.64	18.5	25	37	D			IP54 wall mounted			
FDU48-061-54	73	30	40	61	0.9	22	30	49							
FDU48-074-54	89	37	50	74	1.0	30	40	59							
FDU48-090-54	108	45	60	90	1.2	37	50	72	E				IP54 wall mounted		
FDU48-109-54	131	55	75	109	1.5	45	60	87							
FDU48-146-54	175	75	100	146	2.0	55	75	117							
FDU48-175-54	210	90	125	175	2.4	75	100	140							
FDU48-210-54	252	110	150	210	2.7	90	125	168	F					IP54 wall mounted	
FDU48-250-54	300	132	200	250	3.3	110	150	200							
FDU48-295-54	354	160	250	295	3.6	132	200	236							
FDU48-365-54	438	200	300	365	4.0	160	250	292	FA						IP54 wall mounted
FDU48-430-IP	516	220	350	430	5.5	200	250	344	H						
FDU48-500-IP	600	250	400	500	6.7	220	350	400							
FDU48-590-IP	708	315	500	590	7.2	250	400	472	G2	IP20 module or IP54 cabinet					
FDU48-660-IP	792	355	550	660	7.4	250	450	528	H2						
FDU48-730-IP	876	400	600	730	8.0	315	500	584							
FDU48-810-IP	972	450	700	810	9.9	355	550	648	G3						
FDU48-885-IP	1062	500	750	885	10.8	400	600	708							
FDU48-1010-IP	1212	560	800	1010	11.1	450	700	808	H3						
FDU48-1100-IP	1320	630	900	1100	12.0	500	750	880							
FDU48-1300-IP	1560	710	1100	1300	14.3	560	800	1040	H4						
FDU48-1460-IP	1752	800	1250	1460	16.0	630	1000	1168							
FDU48-1710-IP	2052	900	1500	1710	18.9	750	1200	1368	H5						
FDU48-1820-IP	2184	1000	1600	1820	20.0	800	1250	1456							
FDU48-2190-IP	2628	1200	1900	2190	24.0	1000	1500	1752	H6		IP20 module or IP54 cabinet				
FDU48-2550-IP	3060	1400	2100	2550	28.0	1120	1700	2040	H7						
FDU48-2920-IP	3504	1600	2500	2920	32.0	1300	2000	2336	H8						
Larger sizes available on request															

Larger sizes available on request

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.

IP = Available as IP20 module or mounted in IP54 cabinet.

Motortronics FDU 2.1 - IP54 version

Typical motor power at 3-phase mains voltage 525 V (Model 69-250 and up also available as IP20).

FDU Model	Max. output current [A]*	Normal duty (120%, 1 min. every 10 min.)			Heavy duty (150%, 1 min. every 10 min.)		Frame size	IP class
		Power @ 525 V [kW]	Rated current [A]	Power losses [kW]	Power @ 525 V [kW]	Rated current [A]		
FDU52-003-54	3.0	1.1	2.5	0.10	1.1	2.0	B	IP54 wall mounted
FDU52-004-54	4.8	2.2	4.0	0.12	1.5	3.2		
FDU52-006-54	7.2	3	6.0	0.15	2.2	4.8		
FDU52-008-54	9.0	4	7.5	0.19	3	6.0		
FDU52-010-54	11.4	5.5	9.5	0.25	4	7.6		
FDU52-013-54	15.6	7.5	13.0	0.26	5.5	10.4		
FDU52-018-54	21.6	11	18.0	0.34	7.5	14.4		
FDU52-026-54	31	15	26	0.40	11	21	C	
FDU52-031-54	37	18.5	31	0.48	15	25		
FDU52-037-54	44	22	37	0.54	18.5	29.6		
FDU52-046-54	55	30	46	0.68	22	37		
FDU52-061-54	73	37	61	0.9	30	49	D	
FDU52-074-54	89	45	74	1.1	37	59		
FDU69-082 -54	98	55	82	1.5	45	66	F69	
FDU69-090 -54	108	55	90	1.7	45	72		
FDU69-109-54	131	75	109	2.0	55	87		
FDU69-146-54	175	90	146	2.6	75	117		
FDU69-175-54	210	110	175	3.0	90	140		
FDU69-200-54	240	132	200	3.4	110	160		
FDU69-250-IP	300	160	250	4.3	132	200	H69 (2)	IP20 module or IP54 cabinet
FDU69-300-IP	360	200	300	5.3	160	240		
FDU69-375-IP	450	250	375	6.4	200	300		
FDU69-400-IP	480	250	400	6.9	220	320		
FDU69-430-IP	516	300	430	7.7	250	344	I69 (3)	
FDU69-500-IP	600	315	500	8.6	300	400		
FDU69-595-IP	720	400	600	10.4	315	480		
FDU69-650-IP	780	450	650	11.3	355	520	J69 (4)	
FDU69-720-IP	864	500	720	12.4	400	576		
FDU69-800-IP	960	560	800	13.8	450	640		
FDU69-995-IP	1200	630	1000	17.3	500	800	KA69 (5)	
FDU69-1K2-IP	1440	800	1200	20.7	630	960	K69 (6)	
FDU69-1K4-IP	1680	1000	1400	24.2	800	1120	L69 (7)	
FDU69-1K6-IP	1920	1100	1600	27.6	900	1280	M69 (8)	
FDU69-1K8-IP	2160	1300	1800	31.1	1000	1440	N69 (9)	
FDU69-2K0-IP	2400	1400	2000	34.6	1100	1600	O69 (10)	
FDU69-2K2-IP	2640	1600	2200	38.0	1200	1760	P69 (11)	
FDU69-2K4-IP	2880	1700	2400	41.4	1400	1920	Q69 (12)	
FDU69-2K6-IP	3120	1900	2600	44.9	1500	2080	R69 (13)	
FDU69-2K8-IP	3360	2000	2800	48.4	1600	2240	S69 (14)	
FDU69-3K0-IP	3600	2200	3000	51.8	1700	2400	T69 (15)	

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.

** Number in parenthesis, e.g. H69(2), indicates number of parallel power modules.

IP = Available as IP20 module or mounted in IP54 cabinet.

Motortronics FDU 2.1 - IP54 version

Typical motor power at 3-phase mains voltage 575 V and 690 V (Model 69-250 and up also available as IP20).

FDU Model	Max. output current [A]*	Normal duty (120%, 1 min. every 10 min.)				Heavy duty (150%, 1 min. every 10 min.)			Frame size	IP class
		Power @ 575V [hp]	Power @ 690V [kW]	Rated current [A]	Power losses [kW]	Power @ 575V [hp]	Power @ 690V [kW]	Rated current [A]		
FDU69-002-54	3.2	1.5	1.5	2	0.17	1	0.75	1.6	C69	IP54 wall mounted
FDU69-003-54	4.8	2	2.2	3	0.16	1.5	1.5	2.4		
FDU69-004-54	6.4	3	3	4	0.20	2	2.2	3.2		
FDU69-006-54	9.6	4	4	6	0.23	3	3	4.8		
FDU69-008-54	12.8	5	5.5	8	0.26	4	4	6.4		
FDU69-010-54	16	7.5	7.5	10	0.30	5	5.5	8		
FDU69-013-54	20.8	10	11	13	0.34	7.5	7.5	10.4		
FDU69-018-54	29	15	15	18	0.37	10	11	14.4		
FDU69-021-54	34	20	18.5	21	0.45	15	15	16.8		
FDU69-025-54	40	25	22	25	0.52	20	18.5	20		
FDU69-033-54	53	30	30	33	0.90	25	22	26	D69	
FDU69-042-54	67	40	37	42	1.08	30	30	34		
FDU69-050-54	80	50	45	50	1.14	40	37	40		
FDU69-058-54	93	60	55	58	1.30	40	45	46		
FDU69-082-54	98	75	75	82	1.8	60	55	66	F69	
FDU69-090-54	108	75	90	90	1.9	60	75	72		
FDU69-109-54	131	100	110	109	2.3	75	90	87		
FDU69-146-54	175	125	132	146	2.9	100	110	117		
FDU69-175-54	210	150	160	175	3.4	125	132	140		
FDU69-200-54	240	200	200	200	3.9	150	160	160		
FDU69-250-IP	300	250	250	250	4.9	200	200	200	H69 (2)	IP20 module or IP54 cabinet
FDU69-300-IP	360	300	315	300	6.0	250	250	240		
FDU69-375-IP	450	350	355	375	7.2	300	315	300		
FDU69-400-IP	480	400	400	400	7.7	300	315	320		
FDU69-430-IP	516	400	450	430	8.8	350	315	344	I69 (3)	
FDU69-500-IP	600	500	500	500	9.7	400	355	400		
FDU69-595-IP	720	600	600	600	11.6	500	450	480		
FDU69-650-IP	780	650	630	650	12.8	550	500	520	J69 (4)	
FDU69-720-IP	864	750	710	720	14.0	600	560	576		
FDU69-800-IP	960	850	800	800	15.5	650	630	640		
FDU69-905-IP	1080	950	900	900	17.5	750	710	720	KA69 (5)	
FDU69-995-IP	1200	1000	1000	1000	19.4	850	800	800		
FDU69-1K2-IP	1440	1200	1200	1200	23.2	1000	900	960	K69 (6)	
FDU69-1K4-IP	1680	1500	1400	1400	27.2	1200	1120	1120	L69 (7)	
FDU69-1K6-IP	1920	1700	1600	1600	31.1	1300	1250	1280	M69 (8)	
FDU69-1K8-IP	2160	1900	1800	1800	35.0	1500	1400	1440	N69 (9)	
FDU69-2K0-IP	2400	2100	2000	2000	38.8	1700	1600	1600	O69 (10)	
FDU69-2K2-IP	2640	2300	2200	2200	42.7	1800	1700	1760	P69 (11)	
FDU69-2K4-IP	2880	2500	2400	2400	46.6	2000	1900	1920	Q69 (12)	
FDU69-2K6-IP	3120	2700	2600	2600	50.5	2200	2000	2080	R69 (13)	
FDU69-2K8-IP	3360	3000	2800	2800	54.4	2400	2200	2240	S69 (14)	
FDU69-3K0-IP	3600	3200	3000	3000	58.3	2500	2400	2400	T69 (15)	

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.

** Number in parenthesis, e.g. H69 (2), indicates number of parallel power modules.

IP = Available as IP20 module or mounted in IP54 cabinet.

Motortronics FDU 2.1 - IP20 version

Typical motor power at 3-phase mains voltage 230 V.

FDU Model	Max. output current [A]*	Normal duty (120%, 1 min every 10 min)				Heavy duty (150%, 1 min every 10 min)			Frame size
		Power @ 230V [kW]	Power @230V [hp]	Rated current [A]	Power losses (W)	Power @ 230V [kW]	Power @230V [hp]	Rated current [A]	
FDU48-025-20	30	5.5	7.5	25	0.35	4	5	20	C2
FDU48-030-20	36	7.5	10	30	0.44	5.5	7.5	24	
FDU48-036-20	43	7.5	10	36	0.46	7.5	10	29	
FDU48-045-20	54	11	15	45	0.60	7.5	10	36	
FDU48-058-20	68	15	20	58	0.77	11	15	46	
FDU48-072-20	86	18.5	25	72	0.9	15	20	58	D2
FDU48-088-20	106	22	30	88	1.2	18.5	25	70	
FDU48-105-20	126	30	40	105	1.3	22	30	84	
FDU48-142-20	170	37	50	142	1.7	30	40	114	E2
FDU48-171-20	205	45	60	171	2.1	37	50	137	
FDU48-205-20	246	55	75	205	2.3	45	60	164	F2
FDU48-244-20	293	75	100	244	3.0	55	75	195	
FDU48-293-20	352	90	125	293	3.4	75	100	235	
FDU48-365-20	438	110	150	365	3.7	90	125	292	FA2

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.



Motortronics FDU 2.1 - IP20 version

Typical motor power at 3-phase mains voltage 400 and 460 V.

FDU Model	Max. output current [A]*	Normal duty (120%, 1 min every 10 min)				Heavy duty (150%, 1 min every 10 min)			Frame size
		Power @ 400V [kW]	Power @460V [hp]	Rated current [A]	Power losses [kW]	Power @ 400V [kW]	Power @460V [hp]	Rated current [A]	
FDU48-025-20	30	11	15	25	0.39	7.5	10	20	C2
FDU48-030-20	36	15	20	30	0.48	11	15	24	
FDU48-036-20	43	18.5	25	36	0.51	15	20	29	
FDU48-045-20	54	22	30	45	0.66	18.5	25	36	
FDU48-058-20	68	30	40	58	0.85	22	30	46	
FDU48-072-20	86	37	50	72	1.0	30	40	58	D2
FDU48-088-20	106	45	60	88	1.3	37	50	70	
FDU48-105-20	127	55	75	105	1.4	45	60	84	
FDU48-142-20	170	75	100	142	1.9	55	75	114	E2
FDU48-171-20	205	90	125	171	2.3	75	100	137	
FDU48-205-20	246	110	150	205	2.6	90	125	164	F2
FDU48-244-20	293	132	200	244	3.2	110	150	195	
FDU48-293-20	352	160	250	293	3.6	132	200	235	
FDU48-365-20	438	200	300	365	4.1	160	250	292	FA2

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.



Motortronics FDU 2.1- IP20 version

Typical motor power at 3-phase mains voltage 575 V and 690 V.

FDU Model	Max. output current [A]*	Normal duty (120%, 1 min. every 10 min.)				Heavy duty (150%, 1 min. every 10 min.)			Frame size
		Power @ 575V [hp]	Power @ 690V [kW]	Rated current [A]	Power losses [kW]	Power @ 575 V [hp]	Power @ 690V [kW]	Rated current [A]	
FDU69-002-20	3.2	1.5	1.5	2	0.17	1	0.75	1.6	C2(69)
FDU69-003-20	4.8	2	2.2	3	0.16	1.5	1.5	2.4	
FDU69-004-20	6.4	3	3	4	0.20	2	2.2	3.2	
FDU69-006-20	9.6	4	4	6	0.23	3	3	4.8	
FDU69-008-20	12.8	5	5.5	8	0.26	4	4	6.4	
FDU69-010-20	16	7.5	7.5	10	0.30	5	5.5	8	
FDU69-013-20	20.8	10	11	13	0.34	7.5	7.5	10.4	
FDU69-018-20	29	15	15	18	0.37	10	11	14.4	
FDU69-021-20	34	20	18.5	21	0.45	15	15	16.8	
FDU69-025-20	40	25	22	25	0.52	20	18.5	20	
FDU69-033-20	53	30	30	33	0.90	25	22	26	D2(69)
FDU69-042-20	67	40	37	42	1.08	30	30	34	
FDU69-050-20	80	50	45	50	1.14	40	37	40	
FDU69-058-20	93	60	55	58	1.30	40	45	46	

* Available for a limited time and as long as drive temperature permits. Rated data at 40 °C ambient temperature.



General specifications

General specifications for Motortronics VFX/FDU 2.1

Mains voltage: *	VFX/FDU48 VFX/FDU52 VFX/FDU69	3-ph, 230-480 V** +10%/-15% (-10% at 230 V) 3-ph, 230-525 V** +10%/-15% 3-ph, 400-690 V** +10%/-15%
Mains frequency		45 to 65 Hz
Input total power factor		0.95 (IP20/21 & IP54)
Output voltage		0-Mains supply voltage:
Output frequency		0-599 Hz
Output switching frequency		3 kHz (48-293/295/365 = 2kHz), FDU adjustable 1.5-6 kHz
Efficiency at nominal load		97% for models 002 to 018 (IP20/21 & IP54) 98% for models 025 to 3K0 (IP20/21 & IP54)

* Available for both grounded, corner grounded, and isolated supply (TN and IT nets).

**Nominal voltage selected with parameter.

Environmental conditions

Parameter	Normal operation
Nominal ambient temperature	0°C - 40°C (32°F - 104°F). For size C69/D69/C2(69)/D2(69): 0°C - 45°C (32°F - 113°F). With derating max 55°C
Atmospheric pressure	86-106 kPa (12.5 - 15.4 PSI)
Relative humidity according to IEC 60721-3-3	Class 3K4, 5...95% and no condensing
Contamination, according to IEC 60721-3-3	No electrically conductive dust allowed. Cooling air must be clean and free from corrosive materials. Chemical gases, class 3C2 (coated boards 3C3). Solid particles, class 3S2.
Vibrations	According to IEC 60068-2-6, Sinusoidal vibrations: 10<f<57 Hz, 0.075 mm (0.00295 ft) 57<f<150 Hz, 1g (0,035 oz) Frame sizes B to D2: IEC 60721-3-3 3M4 (2 - 9 Hz, 3.0mm and 9 - 20Hz, acc. 1g (10m/s ²))
Altitude	0-1000 m (0 - 3280 ft) 480V AC drives, with derating 1%/100 m (328 ft) of rated current up to 4000 m (13123 ft) 690V AC drives, with derating 1%/100 m (328 ft) of rated current up to 2000 m (6562) ft Coated boards required for 2000 - 4000 m(6562 - 13123 ft).

Parameter	Storage condition
Temperature	-20 to +60 °C (-4 to + 140 °F)
Atmospheric pressure	86-106 kPa (12.5 - 15.4 PSI)
Relative humidity according to IEC 60721-3-1	Class 1K4, max. 95% and no condensing and no formation of ice.



VFX/FDU48:
Model 430 - 730 (H/G2/H2)

VFX/FDU69:
Model 250 - 400 (H69)



VFX/FDU48:
Model 810 - 1100 (G3/H3)

VFX/FDU69:
Model 430 - 595 (I69)

Standards

Market	Standard	Description
European	EMC Directive	2014/30/EU
	Low Voltage Directive	2014/35/EU
	WEEE Directive	2012/19/EU
	Ecodesign Directive	2009/125/EC
	RoHS II Directive	2011/65/EU
	RED Directive	2014/53/EU
Great Britain (England, Scotland, Wales) UKCA	ECR	Electromagnetic Compatibility Regulation - 2016/1091
	EESR	Electrical Equipment (Safety) Regulation - 2016/1101
	EERPEI	Ecodesign for Energy - Related Products and Energy Information Regulation - 2021/745
	RUCSSEE	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment - 2012/3032
	RER	Radio Equipment Regulations - 2017/1206
All	EN 60204-1:2018	Safety of machinery - Electrical equipment of machines Part 1: General requirements.
	EN IEC 61800-3:2018	Adjustable speed electrical power drive systems Part 3: EMC requirements and specific test methods. EMC Directive: Declaration of Conformity and CE marking
	EN(IEC)61800-5-1: 2007 + A1:2017 + A11:2021	Adjustable speed electrical power drive systems Part 5-1. Safety requirements - Electrical, thermal and energy. Low Voltage Directive: Declaration of Conformity and CE marking
	IEC 60721-3-3:2019	Classification of environmental conditions. Air quality chemical vapours, unit in operation. Chemical gases Class 3C3, Solid particles 3S2.
	EN 50581:2012	Restriction of hazardous substances
North & South America	ULC508C	UL Safety standard for Power Conversion Equipment
	USL	USL (United States Standards - Listed) complying with the requirements of UL508C Power Conversion Equipment
	UL 840	UL Safety standard for Power Conversion Equipment. Insulation coordination including clearances and creepage distances for electrical equipment.
	CNL	CNL (Canadian National Standards - Listed) complying with the requirements of CAN/CSA C22.2 No. 14-10 Industrial Control Equipment.
Russian	EAC	For all sizes.

Operation at higher temperatures

Motortronics AC drives are designed for nominal operation at maximum of 40°C ambient temperature.

Frame size C69/D69/C2(69)/D2(69) rated at max 45°C.

However, for most models, it is possible to use the AC drive at higher temperatures with reduced output rating (derating).

Possible derating

Derating of output current is possible with

-1% / degree Celsius to max +15 °C (max 55 °C for IP54 and IP20/21)

-0.55% / degree Fahrenheit to max +27 °F (max 131 °F for IP54 and IP20/21)

Dimensions, weights and cooling air flow

The tables below give an overview of the dimensions, weights, and the required air flow for cabinet mounting of the modules.

Drives with model numbers up to 48-365 are available as wall mounted modules; with the choice of an IP54 version (frame size B to FA), and an IP20/21 version (frame size C2 to FA2) that is also optimized for cabinet mounting.

Models from 48-430/69-250 and up consist of 2 to 15 paralleled power electronic building blocks (PEBBs), which can be delivered in standard IP54 cabinets, or be cabinet/panel mounted as a conformity to IP20.

Mechanical specifications for models VFX/FDU48/69 - IP20/21 version

Models	Frame size	Dim. H1/H2 x W x D mm (in) IP20*	Dim. H1/H3 x W x D mm (in) IP21**	Weight kg (Lbs) IP20/IP21	Air flow m3/hour
48-025 to 48-030 / 69-002 to 69-013	C2/C2(69)	446 / 536 x 176 x 267 (17.2/21.1 x 6.9 x 10.5)	438 / 559 x 196 x 282 (17.2/22 x 7.7 x 11.1)	17 (37.5)	120
48-036 to 48-058 / 69-018 to 69-025					170
48-060 to 48-105 / 69-033 to 69-058	D2/D2(69)	545 / 658 x 220 x 291 (21.5/25.9 x 8.7 x 11.5)	545 / 670 x 240 x 307 (21.5/26.4 x 9.5 x 12.1)	30 (66)	170
48-106 to 48-171	E2	956 / 956 x 275 x 294 (37.6/37.6 x 10.8 x 11.6)	956 / 956 x 275 x 323 (37.6/37.6 x 10.8 x 12.7)	53 (117)	510
48-205 to 48-293	F2	956 / 956 x 335 x 294 (37.6/37.6 x 13.2 x 11.6)	956 / 956 x 335 x 323 (37.6/37.6 x 13.2 x 12.7)	69 (152)	800
48-365	FA2	1090/ 1250 x 335 x 306 (42.9/49.5 x 13.2 x 12.1)		84 (185)	1020

H1 = Enclosure height H2 = Total height including cable interface H3 = Total height including top cover * without top cover ** with top cover

IP20/21 version of Motortronics VFX 2.1 and FDU 2.1



Frame size C2/C2(69)
IP20

Frame size D2/D2(69)
IP21

Frame size E2
IP20

Frame size F2
IP20

Frame size FA2
IP20

Mechanical specifications for models VFX/FDU48 and VFX/FDU52 - IP54 version

Models (48- or 52-)	Frame size	IP20/21 Dim. H x W x D mm (mm)	IP54 Dim. H x W x D / D1 mm (in)	IP20/21 Weight kg (lb)	IP54 Weight kg (lb)	Air flow m3/hour
003 to 018	B	n/a	350/416 x 203 x 203 (13.8/16.4 x 8 x 7.9)	-	12.5 (27.6)	75
026 to 031	C	n/a	440/512 x 178x292 (17.3/20.2 x 7 x 11.5)	-	24 (52.9)	120
037 to 046						170
061 to 074	D	n/a	545/590 x 220 x 295 (21.5/23.2 x 8.7 x 11.5)	-	32 (70.6)	170
090 to 109	E	n/a	950 x 285 x 314 (37.4 x 11.2 x 12.4)	-	56 (123.5)	510
146 to 175					60 (132.3)	
210 to 295	F	n/a	950 x 345 x 314 (37.4 x 13.6 x 12.4)	-	75 (165.4)	800
365	FA	n/a	1395 x 345 x 365 (54.9 x 13.6 x 14.4)	-	95 (209)	1020
430 to 500	H	1036 x 500 x 450 (40.8 x 19.7 x 17.7)	2200 x 600 x 600 / 680 (86.6 x 23.6 x 23.6/26.8)	170 (374.8)	380 (837.8)	1600
590	G2	1036x500x450 (40.8 x 19.7 x 17.7)	2200x600x600/680 (86.6 x 23.6 x 23.6/26.8)	170 (374.8)	400 (882)	2500
660, 730	H2	1176x500x450 (46.3 x 19.7 x 17.7)	2200x600x600/680 (86.6 x 23.6 x 23.6/26.8)	190 (419)	420 (926)	2700
810, 885	G3	1036x730x450 (40.8 x 28.7 x 17.7)	2200x1000x600/680 (86.6 x 39.4 x 23.6/26.8)	240 (529)	550 (1213)	3250
1010, 1100	H3	1176x730x450 (46.3 x 28.7 x 17.7)	2200x1000x600/680 (86.6 x 39.4 x 23.6/26.8)	280 (617)	590 (1300)	4050
1300, 1460	H4	1176x(500+500)x450 (46.3 x 39.4 x 17.7)	2200x1200x600/680 (86.6 x 47.2 x 23.6/26.8)	380 (838)	840 (1852)	5400
1710, 1820	H5	1176x(730+500)x450 (46.3 x 48.4 x 17.7)	2200x1600x600/680 (86.6 x 63.0 x 23.6/26.8)	470 (1036)	1010 (2227)	6750
2190	H6	1176x(730+730)x450 (46.3 x 57.5 x 17.7)	2200x2000x600/680 (86.6 x 78.7 x 23.6/26.8)	560 (1235)	1180 (2602)	8100
2550	H7	1176x(500+730+500)x450 (46.3 x 68.1 x 17.7)	2200x2200x600/680 (86.6 x 86.6 x 23.6/26.8)	660 (1455)	1430 (3153)	9450
2920	H8	1176x(730+500+730)x450 (46.3 x 77.2 x 17.7)	2200x2600x600/680 (86.6 x 102.4 x 23.6/26.8)	750 (1654)	1600 (3528)	10800

1) IP20 module for cabinet mounting. n/a = not applicable
D1 = Cabinet depth including inlet filter



VFX/FDU48/52: Model 003 - 018 (B)

VFX/FDU48/52: Model 026 - 046 (C)

VFX/FDU48/52: Model 061 - 074 (D)

Mechanical specifications for models VFX/FDU69 - IP54 version

Models (69-)	Frame size	IP20/21 Dim. H x W x D mm (mm)	IP54 Dim. H x W x D / D1 mm (in)	IP20/21 Weight kg (lb)	IP54 Weight kg (lb)	Air flow m3/hour
002 to 025	C69	–	440/512 x 178 x 314 (17.3/20.2 x 7.0 x 12.3)	–	19.8 (43.6)	170
033 to 058	D69	–	545/590 x 220 x 295 (21.5/23.2 x 8.7 x 11.6)	–	32 (70.5)	170
082 to 200	F69	–	1090 x 345 x 314 (42.9 x 13.6 x 12.4)	–	77 (169.8)	800
250 to 400	H69 (2xF69)	1176 x 500 x 450 (46.3 x 19.7 x 17.7)	2200 x 600 x 600 / 680 (86.6 x 23.6 x 23.6 / 26.8)	176 (388)	399 (879.6)	1600
430 to 595	I69 (3xF69)	1176 x 730 x 450 (46.3 x 28.7 x 17.7)	2200 x 1000 x 600/680 (86.6 x 39.4 x 23.6/26.8)	257 (566.6)	563 (1241)	2400
650 to 800	J69 (2xH69)	1176 x 1100 x 450 (46.3 x 43.3 x 17.7)	2200 x 1200 x 600 / 680 (86.6 x 47.2 x 23.6 / 26.8)	352 (776)	773 (1704)	3200
905 to 995	KA69 (H69+I69)	1176 x 1365 x 450 (46.3 x 53.7 x 17.7)	2200 x 1600 x 600/680 (86.6 x 63.0 x 23.6/26.8)	433 (954.6)	937 (2066)	4000
1K2	K69 (2xI69)	1176 x 1630 x 450 (46.3 x 64.2 x 17.7)	2200 x 2000 x 600/680 (86.6 x 70.9 x 23.6/26.8)	514 (1133)	1100 (2425)	4800
1K4	L69 (2xH69+I69)	1176 x 2000 x 450 (46.3 x 78.7 x 17.7)	2200 x 2200 x 600/680 (86.6 x 86.6 x 23.6/26.8)	609 (1343)	1311 (2890)	5600
1K6	M69 (H69+2xI69)	1176 x 2230 x 450 (46.3 x 87.8 x 17.7)	2200 x 2600 x 600/680 (86.6 x 102.4 x 23.6/26.8)	690 (1521)	1481 (3265)	6400
1K8	N69 (3xI69)	1176 x 2530 x 450 (46.3 x 99.6 x 17.7)	2200 x 3000 x 600/680 (86.6 x 118.1 x 23.6/26.8)	771 (1700)	1651 (3640)	7200
2K0	O69 (2xH69+2xI69)	1176 x 2830 x 450 (46.3 x 111.4 x 17.7)	2200 x 3200 x 600/680 (86.6 x 126.0 x 23.6/26.8)	866 (1909)	1849 (4076)	8000
2K2	P69 (H69+3xI69)	1176 x 3130 x 450 (46.3 x 123.2 x 17.7)	2200 x 3600 x 600/680 (86.6 x 141.7 x 23.6/26.8)	947 (2088)	2050 (4519)	8800
2K4	Q69 (4xI69)	1176 x 3430 x 450 (46.3 x 135 x 17.7)	2200 x 4000 x 600/680 (86.6 x 157.5 x 23.6/26.8)	1028 (2266)	2214 (4881)	9600
2K6	R69 (2xH69+3xI69)	1176 x 3730 x 450 (46.3 x 146.9 x 17.7)	2200 x 4200 x 600/680 (86.6 x 165.4 x 23.6/26.8)	1123 (2476)	2423 (5342)	10400
2K8	S69 (H69+4xI69)	1176 x 4030 x 450 (46.3 x 158.7 x 17.7)	2200 x 4600 x 600/680 (86.6 x 181.1 x 23.6/26.8)	1204 (2654)	2613 (5761)	11200
3K0	T69 (5xI69)	1176 x 4330 x 450 (46.3 x 170.5 x 17.7)	2200 x 5000 x 600/680 (86.6 x 196.8 x 23.6/26.8)	1285 (2833)	2777 (6122)	12000

1) IP20 module for cabinet mounting.

n/a = not applicable

D1 = Cabinet depth including inlet filter



VFX/FDU48: Model 090 - 175 (E)




VFX/FDU48: Model 210 - 295 (F)
VFX/FDU69: Model 082 - 200 (F69)



VFX/FDU48: Model 430 - 500 (H) IP20 module

Control performance for VFX 2.1 (Speed)


Speed control static accuracy
(linearity):



Closed loop = 0.01% of n_{nom} .
Open loop = 0.1% of n_{nom} .


Control performance for VFX 2.1 (Torque)

Torque control static accuracy
(linearity):

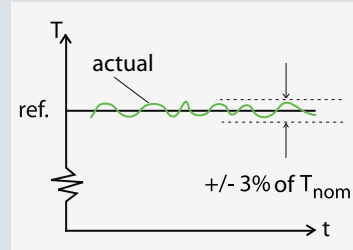


Closed loop: $<3\%$ of T_{nom}
Open loop: $<3\%$ for speeds 10 - 100% of rated,
and $<10\%$ at zero speed (% of n_{nom}).

Speed Control dynamic accuracy
(impact drop):



Closed loop = 0.2% sec (100% load step)
Open loop = 0.4% sec (100% load step)

Torque control dynamic accuracy:



Closed and open loop:
100% torque step rise time = 1 ms.

Control performance for FDU 2.1 (V/Hz)

Speed control accuracy =
approximately 1% of n_{nom}
(slip frequency).

Torque accuracy =
approximately 5% of T_{nom}
(20 - 100% speed).


Basic I/O data

Control signal inputs: Analogue (differential), 4 channels	
Analogue voltage/current Max. input voltage Input impedance	0-±10 V/0-20 mA via switch +30 V 20 k Ω (voltage) 250 Ω (current)
Resolution Hardware accuracy Non-linearity	11 bits + sign 0.5% type + 1 ½ LSB fsd 1½ LSB
Digital: 8 channels	
Input voltage Max. input voltage Input impedance Signal delay	High>9 V _{DC} Low<4 V _{DC} +30 V _{DC} <3.3 V _{DC} : 4.7 k Ω , ≥3.3 V _{DC} : 3.6 k Ω ≤8 ms
Control signal outputs: Analogue, 2 channels	
Output voltage/current Max. output voltage Short-circuit current (∞) Output impedance Resolution Maximum load impedance for current Hardware accuracy Offset Non-linearity	0-10 V/0-20 mA via software setting +15 V @5 mA cont. +15 mA (voltage) +140 mA (current) 10 Ω (voltage) 10 bit 500 Ω 1.9% type fsd (voltage), 2.4% type fsd (current) 3 LSB 2 LSB
Digital, 2 channels	
Output voltage Short-circuit current (∞)	High>20 V _{DC} @50 mA, >23 VDC open Low<1 V _{DC} @50 mA 100 mA max (together with +24 V _{DC})
Relays, 3 pcs	
Contacts	0.1 – 2 A/Umax 250 VAC or 42 V _{DC}
Reference voltages	
+10 V _{DC} -10 V _{DC} +24 V _{DC}	+10 V _{DC} @10 mA short-circuit current +30 mA max -10 V _{DC} @10 mA +24 V _{DC} short-circuit current +100 mA max (together with Digital Outputs)

See "User interface data" on page 26 for connection data and default settings



User interface data

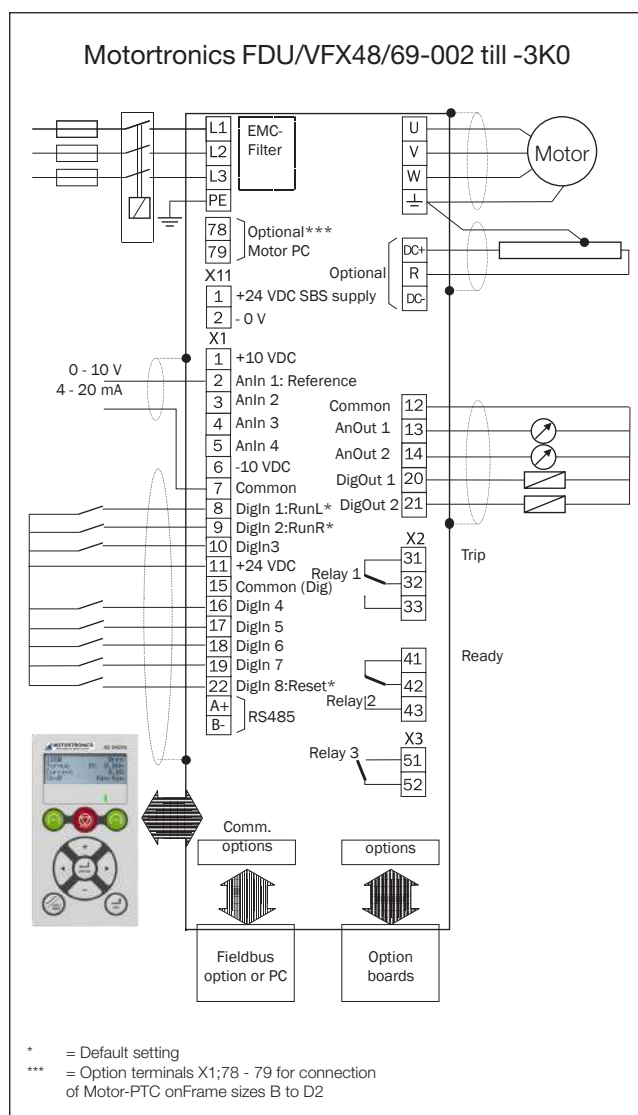

X1	Name:	Function (Default):
1	+10 V	+10 VDC Supply voltage
2	AnIn1	Speed reference
3	AnIn2	Not used
4	AnIn3	Not used
5	AnIn4	Not used
6	-10 V	-10VDC Supply voltage
7	Common	Signal ground
8	DigIn 1	RunL
9	DigIn 2	RunR
10	DigIn 3	Not used
11	+24 V	+24VDC Supply voltage
12	Common	Signal ground
13	AnOut 1	Min speed to max speed
14	AnOut 2	0 to max torque
15	Common	Signal ground
16	DigIn 4	Not used
17	DigIn 5	Not used
18	DigIn 6	Not used
19	DigIn 7	Not used

X1	Name:	Function (Default):
20	DigOut 1	Ready
21	DigOut 2	Brake/No trip
22	DigIn 8	Reset
A+	A+	RS-485 Differential transmit and receive (Modbus RTU)
B-	B-	

X2	Name:	Function (Default):
31	N/C 1	Relay 1 output=Trip Active when the AC drive is in a TRIP condition.
32	COM 1	
33	N/O 1	
41	N/C 2	Relay 2 Output=Ready Active when the AC drive is ready to start
42	COM 2	
43	N/O 2	

X3	Name:	Function (Default):
51	COM 3	Relay 3 Output=Not used
52	N/O 3	

All inputs and outputs are programmable.

Standard options

For Motortronics VFX/FDU 2.1

STANDARD OPTION	IP20/21 and IP54/20	
	Frame sizes C2 - FA2 and C69 - F69/C2(69) - F2(69)	
	All boards are coated. Support for 3 option boards and one communication option	
	Part no.	Remark
I/O board	01-3876-01	Max 3 I/O board
Encoder board	01-3876-03	Max 1 Encoder board
PTC/PT100 board	01-3876-08	Max 2 PTC/PT100 board
RS232/485	01-3876-04	
Standby power supply	Standard built - in input on control board	
Safe Torque Off (STO)	Available as factory built in option IP54 (IP2x:see price list)	
CRIO board	01-3876-07	Only for VFX
Crane interface	590059	230 V _{AC} Only for VFX
	590060	24 V _{DC} Only for VFX
Fieldbus - Profibus	01 - 3876 - 05	
Fieldbus - DeviceNet	01 - 3876 - 06	
Fieldbus - CANopen	01 - 3876 - 16	
Ethernet – Modbus/TCP 1-port	01 - 3876 - 09	
Ethernet – Modbus/TCP 2-port	01 - 3876 - 17	
Ethernet - EtherCAT®	01 - 3876 - 10	
Ethernet - Profinet IO 1-port	01 - 3876 - 11	
Ethernet - Profinet IO 2-port	01 - 3876 - 12	
Ethernet - EtherNet IP 2-port	01 - 3876 - 13	

I/O board



3 extra relay outputs (230 VAC/5 A NO/NC). 3 extra 24 V /3.2 k Ω (AC or DC) differential digital inputs, all programmable. Inputs providing 50 VAC/DC isolation between channels. Maximum 3 I/O boards can be built -in per AC drive.

Encoder board



Differential encoder input suitable for 5 V (TTL) or 24 V (HTL) incremental encoders, range 5-16384 pulses/revolution. Inputs min 9 k Ω . Max frequency = 100 kHz. For single ended or differential type of encoders (A/B, A'/B'). Selectable encoder supply voltage output 5 VDC or 24 VDC.

PTC/PT100 board



1 PTC isolated input conforming DIN 44081/44082. Max 6 PTC thermistors can be connected in series to PTC input. Also including 3 PT100 inputs, 2/3/4-wire, conforming EN 60751.

CRIO board (VFX)



Crane option board to control hoist or travel motions. Inputs for joystick control: supporting 4-step, motor potentiometer or analog reference joystick types. Inputs for slow down and end limits switches (2+2). All 12 digital inputs 24 V/5 k Ω (8 - 24V) DC. 2 relay outputs 250 V/2AAC, for mechanical brake and load deviation protection. Load dependent field weakening operation of hoists also supported.

Crane interface (VFX)



Isolated I/O interface for control signals between (existing) crane controls and crane option board (CRIO).

- Available for 230 V/27 k Ω (120 - 250V) AC
- 24 V /2.7 k Ω (15 - 36 V) DC input signals.
- LED indications for all inputs and outputs.
- For DIN-rail mounting.
- HxWxD = 125 x 150 x 50 mm

RS232/RS485 isolated



Isolated RS232/RS485 serial communication board. For Modbus/RTU communication protocol.

Baud rates: 2400 - 38400 bits/s supported.

Note: RS485 standard built-in on control board

Standard options for Motortronics VFX/FDU 2.1

Fieldbus and Ethernet boards

Typical drive response time = 10 ms (not including any ethernet delays).



Fieldbus - Profibus

Fieldbus option module for Profibus DP or DP V1 communication. Use 9-pin D-sub connector. Baud rates: 9.6 kbits/s - 12 Mbits/s supported.

Fieldbus - DeviceNet

Fieldbus option module for DeviceNet communication. Baud rates: 125 - 500 kbits/s supported.

Ethernet - Modbus/TCP 1-port

Industrial Ethernet option module for Modbus/TCP protocol. RJ45 type connector. Baud rates: 10 or 100 Mbits/s supported.

Ethernet - Modbus/TCP 2-port

Industrial Ethernet option module for Modbus/TCP protocol. M12 type connectors, 2-port. Baud rates: 10 or 100 Mbits/s supported.

Ethernet - Profinet IO 1-port

Industrial Ethernet option module for Profinet IO (RT) protocol. RJ45 type connector. Baud rate: 100 Mbits/s

Ethernet - Profinet IO 2-port

Industrial Ethernet option module for Profinet IO (RT) protocol. 2 x RJ45 type connectors. Baud rate: 100 Mbits/s

Ethernet - EtherCAT®

Industrial Ethernet option module for EtherCAT protocol. 2 x RJ45 type connectors (IN and OUT). Baud rate: 100 Mbits/s

Ethernet - EtherNet IP 2-port

Industrial Ethernet option module for EtherNet IP protocol. 2 x RJ45 type connector. Baud rate: 100 Mbits/s

Fieldbus - CANopen

Fieldbus option module for CANopen communication. CANopen certified, compliant with profile DS301 V4.02. Use 9-pin D-sub connector. Baud rates 10 kbit/s - 1 Mbits/s

Control panel kit, incl. blank panel



External control panel IP54 suitable for mounting on a cabinet door. This option is to be used in combination with an AC drive module ordered with a built-in control panel.

Part no.

01-6878-40 (Size B)

01-6879-40 (Size C)

01-6880-40 (Size D and up)

01-7211-00 (IP2X units. Without PPU)

Control panel kit, incl. control panel



External control panel IP54 suitable for mounting on a panel door. This option is to be used in combination with an AC drive module ordered with a blank control panel.

Part no.

01-6878-00 Std PPU (Size B)

01-6878-10 PPU w Bluetooth (Size B)

01-6878-20 PPU w Wifi (Size B)

01-6879-00 Std PPU (Size C)

01-6879-10 PPU w Bluetooth (Size C)

01-6879-20 PPU w Wifi (Size C)

01-6880-00 Std PPU (Size D and up)

01-6880-10 PPU w Bluetooth (Size D and up)

01-6880-20 PPU w Wifi (Size D and up)

Handheld Control Panel HCP 2.0



Handheld control panel with full functionality. Easy to connect to the AC drive for temporary use during e.g. commissioning and service. The HCP 2.0 enables setting of parameters and viewing of actual values and fault logger. It also offers the possibility to copy parameter data from one AC drive to other AC drives. Part no. 01-5039-30 (complete with cable)

Standard options for Motortronics VFX/FDU 2.1

Software



Connect a PC with a standard RS232 cable under the control panel on the front. PC software makes it possible to perform signal recordings and save/load parameter backup data, for example during service & maintenance.

Glands for IP54 frame sizes B, C and D



Gland kits are available for size B, C, and D. Metal EMC glands are used for motor and brake resistor cables.

Part No	Current	Frame size
01-4601-21	3 - 6 A (M16 - M20)	B
01-4601-22	8 - 10 A (M16 - M25)	
01-4601-23	13 - 18 A (M16 - M32)	
01-4399-01	26 - 31 A (M12 - M32)	C
01-4399-00	37 - 46 A (M12 - M40)	
01-4833-00	61 - 74 A (M20 - M50)	D
01-7248-00	2 - 10A (M20 - M25)	C69
01-7248-10	13 - 25A (M20 - M32)	
01-7247-00	33 - 58A (M20 - M40)	D69

Control panel with Bluetooth or Wifi comm.



New 4-line PPU with Bluetooth or Wifi communication, used with application commissioning and maintenance App (for iPhone and Android phones).



Factory mounted options for Motortronics VFX/FDU 2.1

Blank control panel



Blank panel instead of control panel (to maintain IP54). Indication LED's for Power, Run and Trip available.

EMC filter class C2

EMC filter according to EN61800-3:2004 class C2 - 1st environment restricted distribution. For sizes B to D2. Integrated inside the drive module.


Note: EMC filter according to class C3 - 2nd environment included as standard in all drive units.

PTC

Factory mounted, isolated motor PTC input conforming to DIN44081/44082.

Available with size B to D2. Use PTC/PT100 option board if additional inputs are needed.

Option board for safety function Safe Torque Off (STO)



One OSTO_100 option board for implementing Safe Torque Off functionality in all Motortronics FDU/VFX 2.1 frame sizes, mounted underneath Option mounting plate.

Extra built-in safety inputs (supporting OSSD technology) for activating Safe Torque Off (STO) status, and a STO-status feedback output. Conform to the machine safety norms EN-IEC 61508:2010 / EN-IEC 61205:2005 up to SIL3, and EN-ISO 13849-1:2008 up to PLe category 4.

Brake chopper

All Motortronics VFX/FDU drives can be fitted with an optional built-in brake chopper. Brake choppers are rated for continuous braking at drive rated load (IP20/21 & IP54). This option can not be after mounted. The brake resistor must be mounted outside the AC drive. (See page 33 for Brake resistor option).

DC+ /DC- connection

DC+/DC- terminals for external connection of the Motortronics VFX/FDU drive DC link. This option is required if using the Overshoot clamp.



Extended options for Motortronics

VFX/FDU 2.1 Extended EMC filter 90-660A



EMC filter according to EN61800-3:2004 class C2 - 1st environment, restricted distribution. From frame size E. Rated voltage=480 V, 50/60 Hz. Max. 40 °C ambient temperature.

Drive model	Filter type	Dimensions HxWxD [mm]	Weight [kg]	Enclosure	Power losses (W)
VFX/FDU48-090	3F480-100.260	336x75x200	6.2	IP20 ¹	29
VFX/FDU48-109	3F480-125.260	336x75x200	6.5	IP20 ¹	32
VFX/FDU48-146	3F480-150.260	380x90x220	9.8	IP20 ¹	35
VFX/FDU48-175	3F480-180.260	410x200x120	10.9	IP00 ²	11
VFX/FDU48-210	3F480-220.260	410x200x120	10.3	IP00 ²	12
VFX/FDU48-250	3F480-250.260	410x200x120	9.9	IP00 ²	13
VFX/FDU48-300	3F480320.260	410x200x120	10.6	IP00 ²	17
VFX/FDU48-375	3F480-400.260	480x240x150	16.5	IP00 ²	20
VFX/FDU48-430	3F480-500.260	480x240x150	17.2	IP00 ²	27
VFX/FDU48-500	3F480-500.260	480x240x150	17.2	IP00 ²	27
VFX/FDU48-590	3F480-630.260	480x240x150	16.0	IP00 ²	36
VFX/FDU48-660	3F480-700.260	520x240x180	21.6	IP00 ²	42

1=Screw terminal (protected)

2=Busbar terminals

Output choke (dU/dt)

Output chokes (supplied separately) are recommended above app. 100 m cable length for all single drives. Consult your supplier in case of paralleled drives. Due to the switching of output voltage, high capacitive peak currents will run through the parasitic capacitances between the phases and to earth. Screened cables have more parasitic capacitances. Output chokes should be installed as close as possible to the drive output. Output chokes also limits voltage peaks at motor winding.

Rated voltage = 800 V, IP00 units. Suitable for up to IP23 cabinet installation.

Max. 40°C ambient temperature.

Parallel connection of output coils possible if higher current rating required (e.g. one filter per PEBB).



Nominal current (I_N) A/ Phase	L [mH]	Weight [kg]	Dimensions HxWxD [mm]	Power losses (W)	Part no.
2.8	1.5	0.6	60x78x95	4.5	473160 00
4.4	1	0.6	60x78x95	5.0	473161 00
6.6	0.65	0.6	60x78x95	7.0	473162 00
11	0.4	1	65x96x105	10	473163 00
14.3	0.3	1	65x96x105	12	473164 00
18.2	0.25	1.2	74x96x105	14	473165 00
26.4	0.175	1.2	74x96x105	18	473166 00
32	0.15	1.7	84x125x140	22	473167 00
65	0.1	4	105x155x205	48	473168 00
90	0.1	8.4	120x90x235	78	473169 00
146	0.05	10.2	140x190x260	84	473170 00
175	0.05	13.4	160x210x180	114	473171 00
275	0.032	18.4	170x230x200	104	473172 00
275	0.032	18.4	193x254x162	104	74052065L2
320	0.025	18.9	170x230x200	111	473173 00
365	0.022	22.0	254x220x190	135	74052068L3I
410	0.021	22.6	180x240x210	134	473174 00

Overshoot clamp

Together with the output choke, the overshoot clamp limits the voltage to the motor.

For rated voltages 380 - 690 V.

H x W x D = 250 x 145 x 95 mm

Part no.

052163 (size B-F/F2/F69)

052220 (size H and up)



Sine wave filter



Only for use with FDU drives. Rated voltage= 400 V $\pm$ 25%, 50/60 Hz (690 V on request). Max. 40°C ambient temperature. IP20= with enclosure and screw terminals. IP00=no enclosure and busbar connections.

Voltage drop approximately 25 V at rated current, 50 Hz.

Overload: 110% for 5 min, 150% for 2 min or 200% for 30 s. For further information see filter selection guide, page 34

Filter type 3AFS400-	Protection class	Power [kW]	Nom. current (I _N) A/Phase	Power loss [W]	Weight [kg]	Dimensions HxWxD [mm]
002.5	IP20	0.75	2.5	75	5	190x165x160
004	IP20	1.5	4	90	5	190x165x160
007	IP20	2.2	7	125	7	250x162x162
010	IP20	4	10	165	9	250x162x162
013	IP20	5.5	13	190	12	250x162x162
016	IP20	7.5	16	220	13	300x210x180
025	IP20	11	25	250	18	300x250x210
035	IP20	15	35	275	25	300x270x235
010	IP00	4	10	165	9	195x200x115
013	IP00	5.5	13	190	12	225x200x115
016	IP00	7.5	16	220	13	225x240x135
025	IP00	11	25	250	18	270x250x160
035	IP00	15	35	275	25	270x250x160
050	IP00	22	50	320	45	280x300x250
063	IP00	30	63	550	49	270x300x370
080	IP00	37	80	380	65	324x360x320
100	IP00	45	100	530	65	324x360x320
125	IP00	55	125	650	85	335x390x320
150	IP00	75	150	580	119	440x480x340
180	IP00	90	180	760	131	440x480x340
250	IP00	132	250	600	135	420x420x390
300	IP00	160	300	1000	140	420x420x390
400	IP00	200	400	1100	320	440x500x400
500	IP00	250	500	1250	335	470x500x400

Common mode filter

Common mode filters are mainly used to reduce common mode currents in motors (typically used with motors >size 280). Common mode filters can prevent damage of motor bearings.

All three motor phases (without shield) are to be routed through common mode filter rings.

These filters can also be used to reduce EMC emissions in supply cables.

Di = 35mm, Dy = 59mm, L = 55mm, m = 0,35kg.

Part no. 052213 (size H - T69 require one Common mode filter per PEBB).



Extended options for Motortronics VFX/FDU 2.1

Brake resistors



VPR= Compact – IP54 with 0.75 m shielded cable.
 BEGT= Resistor with stainless steel alloy grid – IP20 or IP23 with thermo contact.
 For dynamic braking by connection to the drive brake chopper output (optional)

Type	Resistor power [kW] in % duty cycle					Dimensions H x W x D [mm]	
	100 (>1.5 min)	60 (1 min < t ≤ 1.5 min)	40 (≤ 1 min)	25	6	IP54	
VPR 200-__R	0.2		0.47	0.74	3.6	200x60x31	–
VPR 300-__R	0.3		0.705	1.11	5.4	250x60x31	–
VPR 400-__R	0.4		0.94	1.48	7.2	301x60x31	–
VPR 500-__R	0.5		1.175	1.85	9.0	370x60x31	–
DEGT1VPR1000S_R-S	1		2.0	3.7	13.0	542x98x170	–
						IP20	IP23
BEGT 13#05-__R	2.5	3.25	4.25	6.25	21.0	301x483x326	500x483x326
BEGT 13#08-__R	4.0	5.2	6.8	10.0	34.0	301x483x326	500x483x326
BEGT 13#10-__R	5.0	6.5	8.5	12.5	42.5	301x483x326	500x483x326
BEGT 14#15-__R	7.5	9.8	12.7	18.7	64.0	301x483x426	500x483x426
BEGT 15#20-__R	10.0	13.0	17.0	25.0	85.0	301x483x526	500x483x526
BEGT 17#30-__R	15.0	19.5	25.5	37.5	127.0	301x483x740	500x483x740
BEGT 25#40-__R	20.0	26.0	34.0	50.0	170.0	601x484x526	800x484x526
BEGT 27#60-__R	30.0	39.0	51.0	75.0	255.0	601x484x736	800x484x736
BEGT 37#90-__R	40.0	52.0	68.0	100.0	340.0	1021x484x736	1181x484x736
BEGT 47#120-__R	50.0	65.0	85.0	125.0	425.0	1321x483x736	301x483x736
2xBEGT 27#60-__R	60.0	78.0	102.0	150.0	510.0	2x(601x484x736)	2x(800x484x736)
2xBEGT 37#78-__R	70.0	91.0	119.0	175.0	600.0	2x(1021x484x736)	2x(1181x484x736)
2xBEGT 37#90-__R	80.0	104.0	136.0	200.0	680.0	2x(1021x484x736)	2x(1181x484x736)
2xBEGT 47#120-__R	100.0	130.0	170.0	250.0	850.0	2x(1321x483x736)	2x(1481x483x736)

= 2: IP20, example BEGT 13205

= 4: IP23, example BEGT 13405

__R: resistance in ohm, example 26R=26 ohm

__R_: resistance in ohm, example 6R5=6.5 ohm

t : Braking time

Liquid cooling

Drive modules in frame sizes E - O and F69 - T69 are available in a liquid cooled version. These units are designed for connection to a liquid cooling system, normally a heat exchanger of liquid-liquid or liquid-air type. Heat exchanger is not part of the liquid cooling option. Drive units with parallel power modules (frame size H - T69) are delivered with a dividing unit for connection of the cooling system. The drive units are equipped with rubber hoses with leak-proof quick couplings.



Filter selection guide

Phenomenon	FILTERS				
	Common mode filter	Output choke	Output choke & overshoot clamp	Sine wave filter	All-pole sine wave filter
Common mode currents	Effective	Limited effect	Limited effect	Effective	Very effective
Bearing currents	Effective				Very effective
Voltage spikes U-V-W		Limited effect	Very effective	Very effective	Very effective
Voltage spikes U-PE		Limited effect	Effective	Limited effect	Very effective
dU/dt		Effective	Effective	Very effective	Very effective
Minimize motor audible noise		Limited effect	Limited effect	Effective	Effective
EMC conducted emission	Limited effect	Limited effect	Limited effect	Effective	Very effective

Recommendations with the different supply voltages up to and including 480 V

Situation	FILTERS				
	Common mode filter	Output choke	Output choke & overshoot clamp	Sine wave filter	All-pole sine wave filter
Not rated, delicate or difficult positioned motors	X			X	
Motor in frame size >280	X				
IEC 60034-17 motor		X			
IEC 60034-25 curve A motor	Cable lengths 0-100m**				
	Cable lengths 100-200m	X			
	Cable lengths 200-500m			X	
Dynamic use with frequently raised DC voltage (braking)			X		
Unshielded cables *					X

X = advised solution for this setup

Recommendations with the different supply voltages from 500 V - 690 V

Situation	FILTERS				
	Common mode filter	Output choke	Output choke & overshoot clamp	Sine wave filter	All-pole sine wave filter
Not rated, delicate or difficult positioned motors	X			X	
Motor in frame size >280	X				
3 kV isolation windings **					
IEC 60034-25 curve B motor	Cable lengths 0-100m**				
	Cable lengths 100-200m		X		
	Cable lengths 200-500m			X	
Dynamic use with frequently raised DC voltage (braking)			X		
Unshielded cables *					X

X = advised solution for this setup

Remarks


Cable lengths should always be as short as possible.
The table is based on correct EMC wiring with shielded cable and proper EMC installation.
Voltage drop over the complete system must be less than 10% of the main supply.

Sine wave filters are only for use with V/Hz control mode.

* Conducted interference limits on unshielded motor - lines according to EN61800-3, table 16.

** No marks in a row, means that there is no need to take precautions.

CAD drawings available on the web

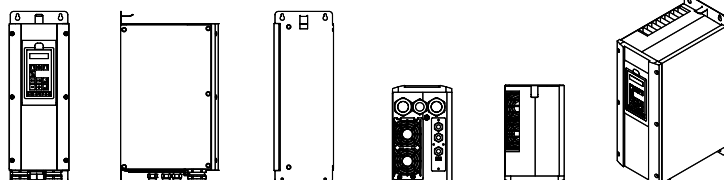

2D and 3D CAD drawings for Motortronics AC drives, softstarters and monitors are available via our website. These will assist anyone working with our products, for example, consultants, installers or machine builders. Visit www.motortronics.com for direct access to all CAD documents.

[illegible]



MOTORTRONICS

Solid State AC Motor Control Motortronics International Korea

■ Ulsan Headquarter / Factory

41, Cheoyongsaneop 4-gil, Cheongnyang-eup, Ulju-gun, Ulsan, 44988 Korea

Tel : 052 - 237 - 5805

FAX : 052 - 237 - 5806

E-mail: mik@motortronics-korea.com

www.motortronics-korea.com

■ Seoul office

#533, 7, Baekbeom-ro 31gil, Mapo-gu, Seoul, 04147 Korea
